



WWW.BULLBBQ.COM

INSTALLATION GUIDE

ITEM# 47017

DESCRIPTION - 4 Burner Grill Jacket


Use with *Angus Grill Head*

Lonestar Grill Head

Outlaw Grill Head

Note: Not for use with 4 burner griddle

Grill Jacket must be supported from the bottom, there are no predrilled holes, so framing can be done how the builder chooses. Drill through the bottom of grill jacket to secure to framing. When framing the support opening for a insulated grill jacket remember to subtract the thickness of the counter top. Grill jacket can be installed flush with counter or sit slightly above counter top.

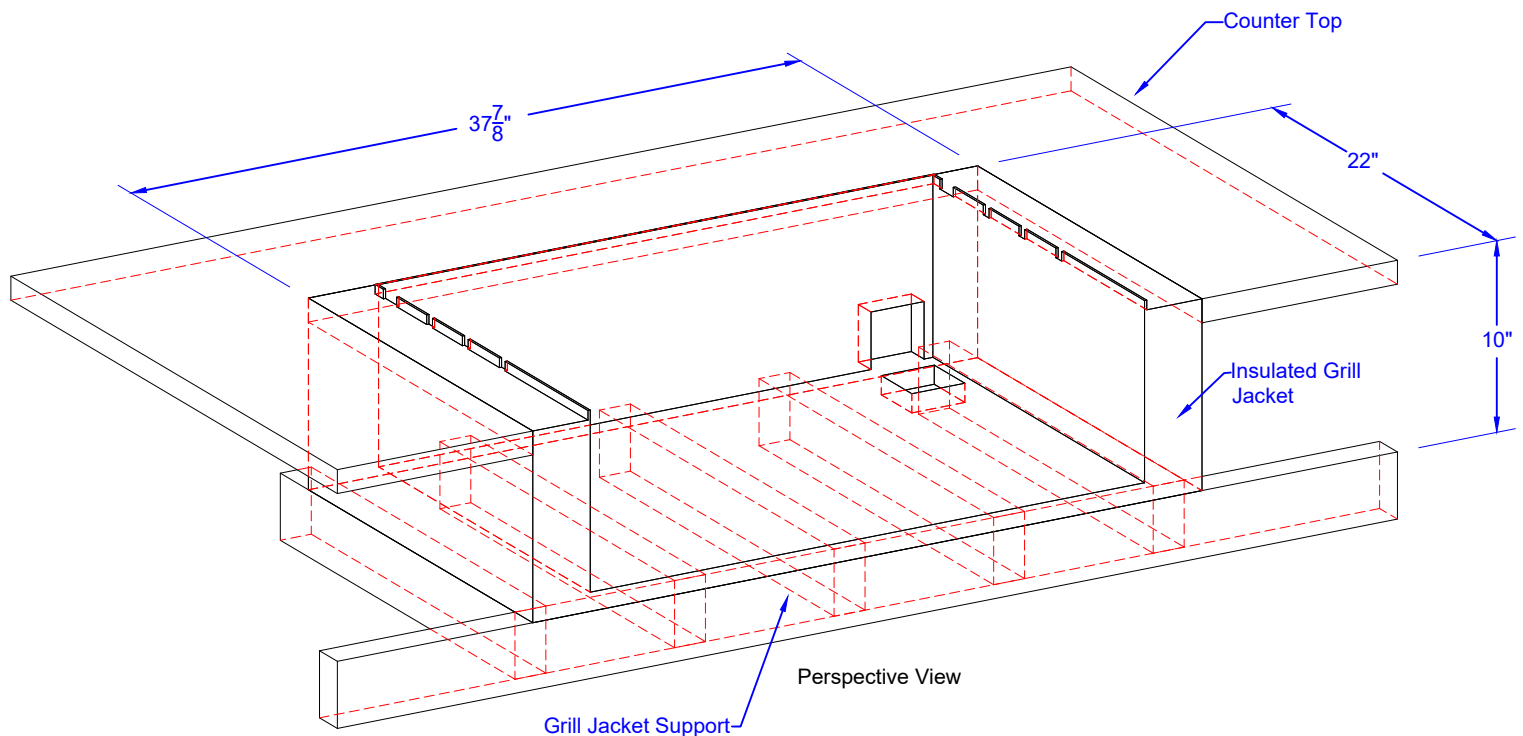

Note: Grill jacket is 10" from the bottom to the top. If flush mount is desired, you must subtract the thickness of your countertop and any substrate.

NOTES:

- 1) ALL DIMENSIONS ARE IN INCH UNITS
- 2) REFER TO PERSPECTIVE VIEW FOR INSTALLATION CUTOUT DIMENSIONS.
- 3) REFER TO PAGES 2-4 FOR WARRANTY POLICY

v.2024.08.26